

# LAMVIN INC.

ACOUSTICAL PRODUCTS

LISTEN TO THE QUIET

- HOME
- PRODUCTS
- MOUNTINGS
- CONTACT
- LINKS

Print this page

Soft Tone  
Phone: 800-446-6329

**::Soft-Tone® Acoustical/Tackable Panels**

A versatile sound barrier which has acoustical qualities, and tackability.

Lamvin's standard panel construction:

**Fabric Color selector:**

[[click here to open in pdf format](#)]

**Acoustical Core:**

Perforated mineral fiberboard

**Tackable Core :**

Non-perforated mineral fiberboard

**Finish:**

*Acoustical:* Vinyls are type II 18%, or micro perforated.  
*Fabrics:* Acoustically transparent 100% woven polyester, 66 inches wide, 2-ply, 16 ounce fabric. The fabric is bonded directly to the panel face with all edges wrapped a minimum of 1-1/2 inches to the back of the panel to ensure a flat, wrinkle-free surface with tailored corners. Specified and other fabrics and perforated vinyls are available.


**Tackable:** Non-perforated vinyls are type II

**Fabrics:** (standard as shown above)

**Size and thickness:**

Thickness		
Soft-Tone 50 Series	1/2" STC 24	NRC 50
Soft-Tone 55 Series	5/8" STC 26	NRC 55
Soft-Tone 60 Series	3/4" STC 26	NRC 60
Soft-Tone 80 Series	1" STC 26	NRC 80
Width:	Up to 48"	
Height:	Up to 120"	

**Edge details available:**



Bevel



Radius



Mitered






Pencil radius



Tegular



Square

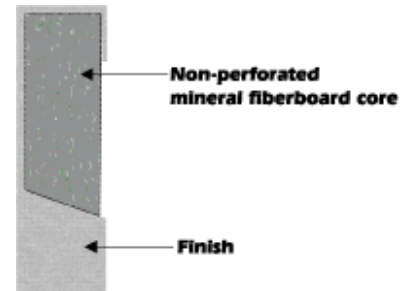

Tackable panel

**Fire test:**  
ASTM E 84 / Class I (or A) flame spread rating (tunnel test)

**Mountings available:**  
Adhesive, concealed spline, edge clip, Velcro

