

LAMVIN INC.

ACOUSTICAL PRODUCTS

LISTEN TO THE QUIET

- HOME
- PRODUCTS
- MOUNTINGS
- CONTACT
- LINKS

Print this page

Soft Tone
Phone: 800-446-6329

::Soft-Tone® Acoustical/Tackable Panels

A versatile sound barrier which has acoustical qualities, and tackability.

Lamvin's standard panel construction:

Fabric Color selector:

[[click here to open in pdf format](#)]

Acoustical Core:

Perforated mineral fiberboard

Tackable Core :

Non-perforated mineral fiberboard

Finish:

Acoustical: Vinyls are type II 18%, or micro perforated.



Fabrics: Acoustically transparent 100% woven polyester, 66 inches wide, 2-ply, 16 ounce fabric. The fabric is bonded directly to the panel face with all edges wrapped a minimum of 1-1/2 inches to the back of the panel to ensure a flat, wrinkle-free surface with tailored corners. Specified and other fabrics and perforated vinyls are available.

Tackable: Non-perforated vinyls are type II


Fabrics: (standard as shown above)

Size and thickness:

| Thickness | | |
|---------------------|-------------|--------|
| Soft-Tone 50 Series | 1/2" STC 24 | NRC 50 |
| Soft-Tone 55 Series | 5/8" STC 26 | NRC 55 |
| Soft-Tone 60 Series | 3/4" STC 26 | NRC 60 |
| Soft-Tone 80 Series | 1" STC 26 | NRC 80 |
| | | |
| Width: | Up to 48" | |
| Height: | Up to 120" | |

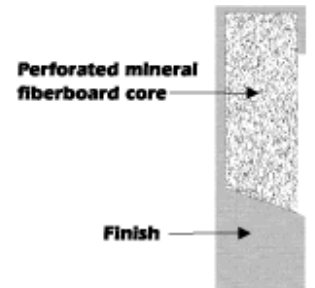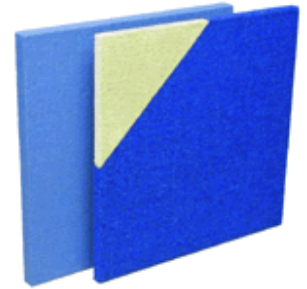

Edge details available:



Bevel



Radius



Mitered




Pencil radius



Tegular



Square

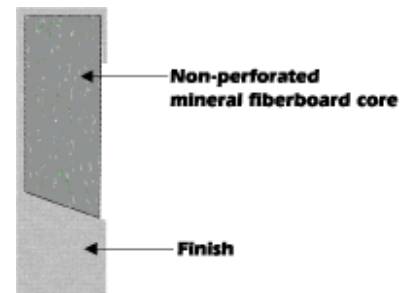

Tackable panel

Fire test:

ASTM E 84 / Class I (or A) flame spread rating (tunnel test)

Mountings available:

Adhesive, concealed spline, edge clip, Velcro

copyright 2004 www.lamvininc.com
powered by www.freshprintmedia.com