

LAMVIN INC.

ACOUSTICAL PRODUCTS

[HOME](#)[PRODUCTS](#)[MOUNTINGS](#)[CONTACT](#)[LINKS](#)

LISTEN TO THE QUIET

[Print this page](#)

Sonic Series

Phone: 800-446-6329

::Tackable High-Impact Acoustical Panel

Designed for tackability and high traffic areas

Lamvin's standard panel construction:

Fabric Color selector:[\[click here to open in pdf format\]](#)**Acoustical Core:**

6-7lb. density, rigid fiberglass

Facing:

10-20 lb density, molded fiberglass 1/8" thick

Edges:

Chemically hardened edges to reinforce panel perimeter against warping and damage (aluminum edge available).

Finish:


Acoustically transparent 100% woven polyester, 66 inches wide, 2-ply, 16 ounce fabric. Fabric is bonded directly to the panel face with all edges wrapped a minimum of 1-1/2 inches to the back of panel to ensure a flat, wrinkle-free surface with tailored corners. Specified and other fabrics and perforated vinyls are available.

Size and thickness:

Thickness	5/8", 7/8", 1-1/8", 1-5/8", 2-1/8" (Custom thickness available)
Width	Up to 48"
Height	Up to 120"

Edge details available:

Bevel



Radius



Mitered



Pencil radius




Tegular



Square



NRC 0.85 to 0.95 on 1"
NRC 1.00 to 1.10 on 2"

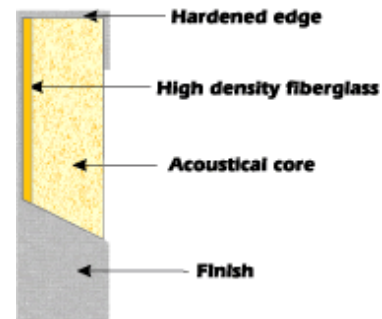**Fire test:****ASTM E 84**

Class I (or A) flame spread rating (tunnel test)

UBC Standard 8-2

(corner burn test)

Mountings available:

Velcro
Adhesive
Impaling clip
Concealed spline
Mechanical "Z" clip
Rotofast clip