

Print this page

Sonic Series  
Phone: 800-446-6329

**::Ultra Plus High-Impact Acoustical Panel**

Combines an extremely tough surface, superior acoustical absorption, durability and low maintenance while maintaining its performance.

Lamvin's standard panel construction:

**Acoustical Core:**

6-7lb. density, rigid fiberglass

**Finish:**

Perforated co-polymer plastic, with 1/8" diameter holes on 3/16" staggered center with 40% open area (custom perforations and colors available)

**Size and thickness:**

Thickness	9/16", 13/16", 1-1/16", 1-9/16", 2-1/16" (Custom thickness available)
Width	Up to 48"
Height	Up to 120"


**Finishes:**

Standard color is white (custom colors available).


**Edge details available:**



Square



NRC 0.85 to 0.95 on 1"  
NRC 1.00 to 1.10 on 2"

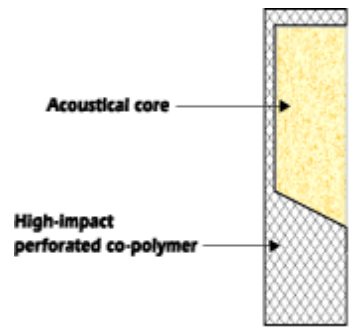

**Fire test:**

ASTM E 84  
Class I (or A) flame spread rating (tunnel test)

**Mountings available:**

Adhesive  
Mechanical "Z" clip