

LAMVIN

4675 North Avenue, Oceanside, CA 92056 | www.lamvin.com

ACOUSTICAL PRODUCTS MANUFACTURER

800.446.6329

SOUND SUCKER PANEL METAL®

This panel is specifically designed for the harshest environments. With strong galvanized facing the Sound Sucker Metal Acoustical Panel provides industrial sound solutions for machine and equipment rooms, where noise control is more than aesthetic comfort, but essential to safety.

Composition:

Acoustical core consists of 6-7 lb. density, rigid fiberglass board. Metal facing 18 - 24 gauge G-90 Galvanized .032 aluminum / stainless steel. Available in flat or corrugated face. Perforations 3/32" diameter on 5/32" staggered centers, 33% open area (custom perforations available).


Finish:

Natural metal or powder coat finish in a variety of colors are also available.

Size: Varies up to 42" x 120"

Thickness: 2" Custom thickness available

Fire Test: All components are ASTM E84—Class I/A

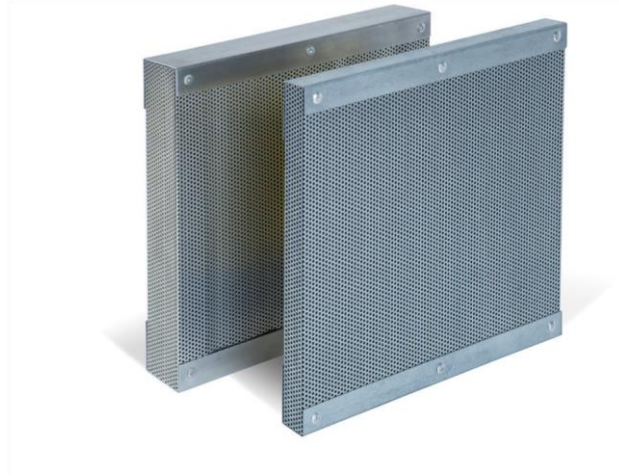

SOUND ABSORPTION

| Thickness | Hz125 | Hz250 | Hz500 | Hz1000 | Hz2000 | Hz4000 | N.R.C |
|-----------|-------|-------|-------|--------|--------|--------|-------|
| 2" | 0.39 | 0.79 | 1.17 | 1.05 | 0.95 | 0.74 | 1.00 |

Testing performed at an accredited acoustical laboratory within a controlled environment using specific fabric, sizes and mounting. Therefore, ratings may vary slightly depending on customers' fabric choice and mounting configuration.

MOUNTING OPTIONS

J-Trim • Z-Trim • Inside/Outside Corners

