

SONIC BASIC PLUS PANEL

The Sonic Basic Plus Panel is available as a standard white acoustical panel or as a painted panel that's designed to blend into room decor. It features an acoustically transparent textured or smooth paint finish that offers the traditional look of drywall or plaster and delivers exceptional sound absorption.

Composition:

Core consists of a 6-7 lb. density rigid fiberglass board layered with a 1/8" high density 10- 20 lb. fiberglass sheet for added strength. Resin hardened edges to reinforce panel perimeter against warping and damage.

Finish:

Coated with an acoustically transparent white paint. May be customized with a smooth or textured finish in a paint color of your choice.

Size: Custom shapes and sizes up to 4' x 12' and 5' x 10' . Thickness 1-1/8" • 1-5/8" • 2-1/8"

Fire Test: All Components are ASTM E84—Class I/A




SOUND ABSORPTION

Thickness	Hz125	Hz250	Hz500	Hz1000	Hz2000	Hz4000	N.R.C
1"	0.17	0.46	0.97	1.06	1.00	1.04	0.85
2"	0.36	0.86	1.09	1.04	0.97	0.95	1.00

Testing performed at an accredited acoustical laboratory within a controlled environment using specific fabric, sizes and mounting. Therefore, ratings may vary slightly depending on customers' fabric choice and mounting configuration.

EDGE DETAIL OPTIONS

Hardened edges to reinforce panel perimeter against warping and damage (aluminum edge available on square edge only).

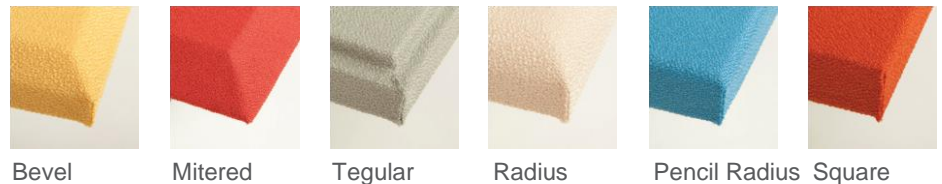

MOUNTING OPTIONS

